



PCT/AU2004/000764

|                   |     |
|-------------------|-----|
| REC'D 21 JUL 2004 |     |
| WIPO              | PCT |

Patent Office  
Canberra


I, JULIE BILLINGSLEY, TEAM LEADER EXAMINATION SUPPORT AND SALES hereby certify that annexed is a true copy of the Provisional specification in connection with Application No. 2003903929 for a patent by YARRA RIDGE PTY LTD as filed on 28 July 2003.



WITNESS my hand this  
Fourteenth day of July 2004

A handwritten signature in cursive script, reading "J. Billingsley".

JULIE BILLINGSLEY  
TEAM LEADER EXAMINATION  
SUPPORT AND SALES

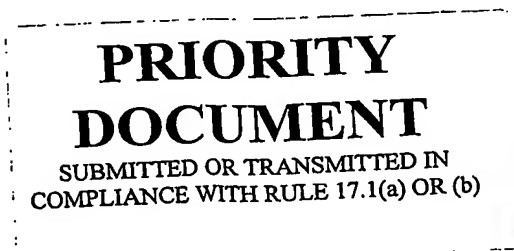

## Field of the Invention

This invention relates to locks for displaceable wings and further describes LOCKS within provisional application of 16/7/03 and previously filed provisional applications.

5

## Definitions and Conventions Employed

*This specification describes LOCK/S (as defined below) substantially as described herein with reference to and as illustrated in the accompanying drawings.*

10 *Throughout this specification and claims which follow, unless the context requires otherwise, the word "comprise", or variations such as "comprises" or "comprising", will be understood to imply the inclusion of a stated integer or group of integers but not the exclusion of any other integer or group of integers.*

15 *Throughout this specification and claims which follow, unless the context requires otherwise, the positional prepositions such as rear, forward are used to assist in description of the preferred embodiments and with reference to the accompanying drawings and have in general no absolute significance.*

*Throughout this specification and claims which follow, unless the context requires otherwise, the words cabinet and wing embraces both displaceable doors and windows and the word door embraces wings.*

20 *Throughout this specification and claims which follow, unless the context requires otherwise: **latching** means displacement of the **latch-bolt** against **biasing means** by an **engageable means** (in one form comprising a **strike plate**) and subsequent displacement of the latch-bolt into engagement with the engageable means (in one form comprising an **aperture** of the strike plate) under the action of the **biasing***  
 25 ***means**; **latch-bolt** is an outwardly biased bolt capable of executing latching; **auxiliary bolt** means an outwardly biased plunger that is operably associated with the latch bolt; **unlatching** means withdrawal of the latch-bolt from engagement with the engageable means; **unlatching lever** is a lever or knob that is hand operable to cause the latch-bolt to become disengaged; **locking means** configuring the lock to*  
 30 *restrain it from becoming unlatched, in many cases taking the meaning of restraining the deadlocking means to thereby restrain it from becoming unlatched; **deadlocking means** means (and where appropriate to restrain a deadlocking slide) to configure the lock to restrain the latch-bolt from being displaced from the configuration that it assumes when engaged with the engageable means (in the case of a rectilinearly*  
 35 *displaceable bolt it assumes a fully extended position when engaged with the engageable means); **deadlocked** means it cannot be displaced from the extended position by external forces; **deadlatching** refers to automatic deadlocking of the bolt*

during latching of the bolt – i.e. the bolt becomes deadlocked as a result of latching; **remote-lock** means a locking means disposed from the lock that includes a remote bolt that is operably connected to the lock – often there is an upper and a lower remote-lock situated above and below the lock; **French door** means a door comprising a hollow frame with a glass in-fill where the hollow within the frame is comparatively small in depth, and **security doors** means a door comprising a hollow framed with an in-fill where the hollow within the frame is comparatively small in depth and in width - some security doors having a close weaved infill material, some having expanded aluminium mesh; **lock-body** is the lock portion fitted within the hollow frame of the wing; **depth of lock-body** is the extent of the lock body in a direction parallel to the face of the door; **width of lock-body** is the extent of the lock body in a direction at right-angles to the face of the door; **free-rotation-cylinder** (also called a free-movement-cylinder) is a cylinder comprising a key operable barrel within a **cylinder housing** connected to a **first cam** (in one form [and commonly] having a radially protruding arm) with free movement, said free-rotation-cylinder preferably comprising a **double cylinder** sub-assembly comprised of opposed barrels each connected with free movement to the same first cam such that the cam is free (between limits) to be angularly displaced while the barrels remain undisplaced; **free-rotation-cylinder** (also called a free-movement-cylinder) is a cylinder comprising a key operable barrel within a **cylinder housing** connected to a **first cam** (in one form [and commonly] having a radially protruding arm) with free movement, said free-rotation-cylinder preferably comprising a **double cylinder** sub-assembly comprised of opposed barrels each connected with free movement to the same first cam such that the cam is free (between limits) to be angularly displaced while the barrels remain undisplaced. This type of (free rotation) cylinder is commonly used in security door locks in Australia – it enable the cam to be displaced by either barrel to a locking configuration and then the barrel to be reverse rotated to an undisplaced position enabling key removal while leaving the cam in the locking position. This type of cylinder is distinct from more commonly used double cylinders that employ clutches and that do not have free rotation between the barrels and first cam; **fixed-cam-cylinder** is a cylinder comprising a key operable barrel within a **cylinder housing** connected to a **first cam** (in one form [and commonly] having a radially protruding arm) without free movement; **clutched cylinder** is a double fixed-cam- cylinder that includes a clutch to select which barrel is the operative barrel, said operative barrel being displaceable by key to displace the cam (without free movement relative to the operative barrel – said clutched cylinder usually employing key insertion to operate the clutch.

*This and the other provisional applications cited in the complete applications associated with this provisional describe inventions comprising improved **complete locks** for displaceable wings and **improvements for locks** for displaceable wings, for convenience referred to herein as "**LOCKS**" – the improvements being*

5 *transportable into other locks and locking devices without being limited to the complete locks described herein.*

### **Background to the Inventions**

Common remote locks such as those employed in security doors operate

10 remote locks by displacing a rod or cable about 11 MM [this displacement being limited by the geometry of a standard Euro cylinder first cam meshing with a commonly used deadlocking slide] In these cases the remote bolt of the remote lock is operably connected to the deadlocking slide by a vertically elongated member

(including rod and cable) to be operable by deadlocking slide displacement. Not only

15 does the displacement operate the remote bolts but a portion of the motion is reserved for deadlocking the remote bolt once it has become fully extended – this is to prevent the remote bolt from being displaced inwardly to displace the vertically elongated member to displace the deadlocking slide to unlock a lock that has been locked to the second locking configuration described below. It will be appreciated that

20 11 MM is not a lot of displacement and it has proved barely sufficient for the purpose. In cases where the remote bolt comprises a simple plunger-like member connected directly to a rod the 11MM is inadequate and the displacement required is at least 15MM.

French doors typically have a strip of compressible sealing material located

25 between the door and the edge that it closes against – this strip being to prevent energy loss. In this case the latch bolt may be restrained by the strike plate from entering the strike plate aperture until a closed door is further displaced in a closing direction (to compress the seal) by other means such as forcing the door and/or employing remote locks. In the latter case, the remote locks (usually comprising a

30 plunger-like member) have to be displaced to bridge the gap between door and door jamb and then further displaced to compress the seal – in practice a minimum of 15 MM has proved necessary. It will also be appreciated that the lock must be capable of delivering actions greater than normally would be required for just locking and unlocking.

35 To be suitable for French doors a lock must have a lock body: of small depth that typically is not more than 40MM; of small setback that typically is 30MM - (setback being distance from the front of the face plate to a through the centerline of

the cylinder and unlatching cam); of small width that typically is 17 MM, and typically, the lock bolt can extend 16 MM from the lock body.

Preferably, an industry standard for the distance between the cylinder and lever axii of 85.00 MM should be observed.

5       The above requirements impose boundary conditions on the inventions that are quite restrictive. Because the rectilinear bolt needs to extend adequately into the casing (when it is fully extended) to be properly supported and preferably by a portion of length not too dissimilar from the extended length this restriction places requirements on the integers responsible for bolt displacement and restrictions on  
10 integers competing for space adjacent the bolt. Because the lock body must fit within an extrusion (and this defines both the width and depth of the lock body) this places restrictions on the width of the bolt and integers competing for space adjacent the bolt and within the casing.

15       This and prior related provisional applications (related being defined as meaning other provisional applications cited in the complete applications associated with this provisional) describe various LOCKS.

### **Description of the Figures**

20       Embodiments of the present invention will now be described by way of example only with reference to the accompanying drawings in which:

Fig 1 is a schematic side view of a lock body with the operating lever superimposed.

Fig 2 is a schematic side view of the lock body not requiring a bolt

Fig 3 shows the ball controlling the driver annulus

25       Fig 4 shows details of springs and screws

Fig 5 is a lock having a first and third locked configurations

Fig 6 shows the underside of a lever backplate

### **Description of the Preferred Embodiments**

30       Integers include a **bolt 1** and a **casing 2**, said casing in some forms comprising a substantially hollow **box-like member 3** and a **face plate 4** attached to the casing by **screws** (not shown) having passage through **apertures** (not shown) in the face plate to engage in **apertures 9** in the casing, while in other cases a **spacer** member is inserted between the face plate and casing to provide a lock of increased  
35 backset in which case the bolt and auxiliary bolt are of extended length. In some forms the face plate and casing comprise a single member such as a single casting.

The bolt preferably comprising a **first portion 11** (being a substantially prism-like solid) that is displaceable from the casing (by having passage through a **bolt aperture** in the face plate (not shown)) and a **return portion 13** within the casing by which the bolt is supported,

5 Preferably, the corners of the upper and lower edges of the aperture are preferably radiused in form to provide increased face plate strength and the upper and lower edges of the bolt are configured to conform to the aperture profile.

The bolt in some forms comprises an outwardly biased latch bolt as shown in Fig 1, that in some forms has a **leading end 14** profiled on both sides to  
10 accommodate both left hand and right hand doors wherein the leading end has curved, chamfer or otherwise profiled sides to facilitate or assist latching wherein the latch bolt is engageable on either side by a strike plate to be inwardly displaced by the strike plate during latching whereby to be and suitable both left hand and right hand hinged doors.

15 In some forms the bolt is deadlockable such that it cannot be displaced from the extended position by external forces.

Integers include an outwardly biased **auxiliary bolt 16** comprising a **first portion 21** (being a substantially prism-like solid) that is displaceable from the casing by having passage through a **bolt aperture** (not shown) in the face plate and a  
20 **return portion 23** within the casing by which it is supported, the first portion in some forms has a **leading end 53** profiled on both sides to accommodate both left hand and right hand doors that has curved, chamfer or otherwise profiled sides to facilitate or assist latching wherein the latch bolt is engageable on either side by a strike plate to be inwardly displaced by the strike plate during latching whereby to be and  
25 suitable both left hand and right hand hinged doors.

The return portion 23 has an **engaging shoulder** (not shown) (that is preferably ramped in form) protruding towards an adjacent **pseudo-deadlocking slide 205** to overlap an engageable **ramped shoulder** (not shown) of the pseudo-deadlocking slide 205 that extends towards the return portion of the auxiliary bolt.

30 The engageable shoulder is displaced from the bolt by inwards displacement of the auxiliary bolt, said displacement causing the engaging shoulder to slide along the ramp to urge the pseudo-deadlocking slide away from the bolt to thereby release the bolt to enable it to be displaced to the fully extended position by the spring 37. This arrangement is used to restrain the latch-bolt with the leading end described above,  
35 in a partly extended position prior to latching to facilitate latching of a bolt that otherwise would protrude too far to be latched i.e. if fully extended it would protrude beyond the curved lip of a conventional strike plate. The auxiliary bolt is outwardly

biased by a **spring** (not shown). The pseudo deadlocking slide has a **leading end shoulder 201** that is engageable in **recess 202** of the bolt and it is urged towards this engagement by **spring 203** housed in a recess in the said slide. As the bolt is retracted by lever operation, the shoulder 201 displaces into the recess 202 as soon as it presents itself to restrain the bolt in the pre-latching configuration.

Integers further include an **unlatching rocker 20** comprising an angularly displaceable member supported at a **pivotal axis 25** defined by a **pinned extension 26** of the casing side wall 27, with a **first arm 28** extending (from the pivotal axis) **upwardly** to terminate in a **engageable shoulder 28A** while the **second arm 34** extends downwardly to overlap the return bolt portion 13 to be operably connected to the bolt such that the bolt is inwardly displaceable by anti-clockwise angular displacement of the unlatching rocker. Preferably, the overlapping arm portion includes a sideways protruding **drive pin 35** that locates within a substantially vertical **drive slot 36** that in some embodiments is angled rearwardly as it progresses downwardly.

Integers include means to outwardly bias the latch bolt comprising the **spring 37** to urge the bolt.

Integers further includes at least one **unlatching cam 39** connected by shaft (not shown) (the shaft passing from an exterior to an interior **operating lever 41** while having passage through a mating aperture in the cam) (said levers in forms comprising part of **handle assemblies** (not shown) mounted to both face of the door) said unlatching cam having a downwardly extending **unlatching arm 43** that has towards the free end a **driving shoulder 44** that is displaceable in a forward direction by downwards lever operation to rotate the rocker 20 in an anti-clockwise direction to cause the bolt to retract. . The unlatching cam is preferably supported by sideways protruding **cylindrical portions 45** that extends into a **circular aperture** in each side of the casing and the cylindrical portion has the **shaft recess 46** to receive and mate with the **shaft** (not shown).

Integers include an interior hand operable member locking member that in one form comprises a **locking lever 67** (also called a snib-lever) that is connected by a **spindle** (not shown) to an angularly displaceable **locking cam 69** having a spindle **aperture 69A** with which it mates.

Integers further include a **deadlocking slide 73** that in some cases is co-operable with a fully extended bolt to restrain the bolt from being displaced from the fully extended position – in which case a **leading end 74** of the deadlocking slide is engageable behind an **engageable shoulder 75** of the bolt – the configuration in which the bolt and slide cooperate is referred to as the deadlocking configuration and

when so engaged the deadlocking slide can be said to be in a deadlocking position (this position actually comprising a limited range of slide positions over which the bolt and slide so cooperate). The deadlocking slide leading end is preferably **ramped 74A** so that displacement of the slide towards a not-fully-extended-bolt will cause the ramp to slide over shoulder 75 to cause the bolt to be outwardly displaced.

Integers further includes an angularly displaceable **first cam 77** having a radially protruding **cam arm 78** that [as described in Watts AU 706589 and subsequent divisional patents which are included herein by reference] comprises part of a **free-rotation-cylinder 79**.

In forms, the deadlocking slide is operably connected to the locking lever by the shaft 68 that is connected to the angularly displaceable **locking cam** supported in the casing and connected to the deadlocking slide. The cam 69 is preferably supported by cylindrical portions that are supported within a circular aperture in the side walls of the casing, said locking cam having a sideways protruding **arm 81** that engages in a **horizontal slot 82** in the deadlocking slide.

In forms including the cylinder, the deadlocking slide is operably connected to the first cam the deadlocking slide has a **drive recess 83** having an **upper drive face 84** on which the first cam arm engages to drive the deadlocking cam towards the deadlocking configuration and having a **lower drive face 85** on which the cam arm engages to drive the deadlocking slide from the deadlocking configuration and an **exit shoulder 86** (preferably comprising an angled face) connected to the upper drive face disposed such that when in the deadlocking configuration the first cam can be disposed such that an end face of the cam 87 (a face of constant radius) is adjacent the exit shoulder such that the force that is applied to the first cam by the deadlocking slide when an attempt is made to move the deadlocking slide from the deadlocking configuration (as might occur in an attempt to rotate the snib lever) has a direction that passes through the pivotal axis of the cam and so the cam cannot be so rotated and the first cam in this configuration restrains the deadlocking slide.

In forms of LOCKS there are two locking modes: a **second mode** characterized by the first cam arm being within the drive recess and the deadlocking slide having been displaced into the deadlocking configuration by the locking lever or by the first arm (the first arm being operably connected to a cylinder); a **first mode** characterized by the deadlocking slide fully displaced into the deadlocking configuration and the first cam arm displaced from within the drive recess (the first arm being operably connected to a cylinder) to restrain the deadlocking slide fully displaced in the deadlocking configuration from which the deadlocking slide cannot be displaced by the locking lever.



In preferred forms of the invention, the deadlocking slide supports a spring loaded ball that is engageable in recesses in the side of the casing corresponding to an undisplaced slide and a deadlocked slide in the second deadlocking configuration. When the slide is displaced to the first deadlocking configuration it is  
 5 doeen so againstbubiasing casused by the ball and spring.

There is preferably an oversized aperture allowing passage of the ball to enable the ball and spring to be loaded after the lock has been assembled.

Alternatively, the deadlocking means includes a deadlocking slide (substantially as described above) and a cylinder substantially as described above  
 10 but having a clutch (where there is no free movement between barrel and cam) where the cam is operated by being rotated 360 degrees – in which case, the locking lever and cam 69 are omitted. In this case during locking, the first cam leaves the recess, passes over the exit face and comes to rest in the initial undisplaced position enabling key removal. In this case, the spring loaded ball is engageable in recesses  
 15 corresponding to an undisplaced slide and a deadlocked slide in the first deadlocking configuration. There is preferably an oversized aperture allowing passage of the ball to enable the ball and spring to be loaded after the lock has been assembled.

The lock further includes drive means to operate a) a remote lock that is operated by a vertically elongated drive member that connects to one or other of the  
 20 drive slides of the lock and b) an upper and lower remote lock each operated by a single vertically elongated drive member that runs from one to the other and is connected to a drive slide of the lock and an upper and lower remote lock each operated by a separate drive slide each connected by a separate vertically elongated drive member.

25 The drive member in one form comprises a rod with ends adapted to be connected to a drive slide said adaption in one form comprising a right angle return portion. The drive member in another form comprises an inner Bowden cable with an end adapted to be connected to a drive slide said adaption in one form comprising a right angle return portion.

30 The lock includes one and preferably a pair of counteracting drive slides and an angularly displaceable driver member 212 preferably comprising a drive annulus that is supported within the casing within a raised annular wall 213 that completely or partly surrounds the annulus, said annular wall being supported by a casing side wall.

35 In a form of the invention, the driver member at radial distance from its pivotal axis is operably connected to an upper drive slide 221 by a first pin-joint (providing relative angular displacement between the driver and slide) comprising a pin free

within the slide and embedded in the driver member, or alternatively by a first slide-joint comprising a protruding pin of the driver member within a substantially horizontal slot of the drive slide. In some forms, the drive member is connected to a **lower drive slide** by a **second pin-joint** or by a second slide-joint. Preferably the first and second joint are on opposite sides of the drive pivotal axis with one being rearwardly disposed while the other is forward disposed, and preferably the first joint is rearwardly disposed as shown in Fig 1. . Preferably the first and second joint are on opposite sides of the driver member with one being adjacent one side of the casing and the other adjacent the other as shown in Fig 1.

Preferably the radial distance between the pin of the first pin-joint and pivotal axis (defined here as the **effective radius**) is substantially the same the radial distance between the pin of the second pin-joint and pivotal axis and preferably the radial distance between the pins of the slide-joints and pivotal axis is also substantially the same as the effective radius.

Preferably, the **pivotal axli 39A** of the unlatching cam 39 and lever 41 is parallel to and separate from the pivotal axis of the driver member by less than the effective radius of the driver member and in a preferred form of the invention the cylindrical portions of the unlatching cam are supported in apertures in the casing side walls said apertures being within a circumference defined by the effective radius and where the driver member takes the form of an annulus, the unlatching cam is within the outer circumference of the driver member.

The driver member has two drive **driven shoulders 206 and 205** (in a form defined by a recess therebetween) that are engageable by a **drive arm 207** comprising a radially extension of the drive cam 39 and they are spaced such that when the driver member is undisplaced and the lever 41 is undisplaced, the drive arm abuts 206 and when the lever is lifted to fully displace the driver member (to operate [latch] remote locks) the arm 207 engages 206 and displaces it downwardly to a limit and when the lever is then returned to the undisplaced position arm 207 abuts 205 as shown in Fig 1. When the lock is unlatched by pushing the lever down the arm 207 drives 205 to the undisplaced position (to operate [unlatch] remote locks). Importantly the fully retracted latch bolt coincides with an undisplaced driver member.

In a preferred embodiment where both drive slides are towards the rear of the casing, the second pin of the pin-joint is connects an intermediate member 224 to the driver member. Intermediate member 224 is connected by a third pin-joint to a rocker 227 that extends from a fourth pivotal joint 229 located forward of the casing to terminate in a free end rear of the casing, said free end including a fifth pin-joint 226

shared with an alternative lower drive slide 221B that extends towards the lower end of the casing and preferably passing behind the locus of the bolt. By this and other means the first bolt portion is enabled to slide between the side walls of the casing and the casing (for a given bolt width) has minimum width by not having to  
 5 accommodate other components beside the bolt first portion.

Rotation of the annulus in a locking direction (anti-clockwise) by lifting the lever drives 221 upwardly (to extend a remote bolt) and the member 221B downwardly by causing the intermediate member to pull the rocker downwardly (to extend a remote bolt). Preferably the upper and lower drive slides displace  
 10 simultaneously in opposite directions and preferably the total displacement of each is identical (although at any intermediate position this may not be so) and so preferably the lengths of the intermediate member, the length of the rocker and the location of the joints are configured to provide such. Rotation of the driver member in a  
 15 unlatching and unlatching direction (clockwise) by lowering the lever (to retract the latch bolt) also drives the member 221B upwardly and 221 downwardly (to retract remote bolts).

In forms of LOCKS, the deadlocking slide is connected to a vertically elongated locking slide 260 that has a locking end 261 that is displaceable into a recess 262 of the driver annulus to restrain it from displacing from the displaced  
 20 position corresponding to extended remote bolts, said restrained configuration corresponding to a either a first or second locked configuration of the lock as defined above.

In forms of LOCKS there is a lock for the non-opening door (second door) of a pair of French doors in which the latch bolt and auxiliary bolt are omitted and there is  
 25 only one or a pair of remote bolts operated by a lever. In this form the casing is adapted to include an outwardly biased plunger comprising a second auxiliary bolt that when depressed engages in a peripheral recess of the driver annulus to restrain it from displacing from the displaced position corresponding to extended remote bolts. This second auxiliary bolt is depressed when the first door is closed wherein  
 30 the faceplate of the first door slides over the second auxiliary bolt to depress it.

Integers further include a means of releaseably restraining the driver member in the fully displaced position to restrain the elongated drive members against displacement and to restrain driver member in the undisplaced position to restrain the unlatching cam from being displaced by levers biased towards the undisplaced  
 35 position but needing to displace upwardly from that position to operate the remote locks, said means including a recesses 240 within the side of the drive annulus, a ball 241 biased towards the annulus by spring 242.

Integers further includes, a lower secondary slide 230 (preferably comprising rod) a that is connected by a pin-joint to the lower drive slide and this secondary slide has upper and lower sideways protruding pins that slide within slots in the casing sides – said slide having an aperture to receive the return portion of a lower rod or a  
5 an aperture to receive a return portion of a lower Bowden cable. It is convenient to note here that the upper drive slide is supported between substantially vertical walls of an extension to the component defines a portion of the annulus side wall, said upper drive slide at its upper end having an aperture to receive the return portion of an upper rod or an aperture to receive a return portion of an upper Bowden cable.  
10 Where it is required for the cable or rods to operate in the same direction, the secondary slide is connected to the first drive pin by an elongated member preferably comprising a rod.

When the bolt is restrained by the deadlocking slide, the rocker 20 cannot be displaced so the lever cannot be operated downwardly.

15 In other forms of the invention where compression of a seal is not required, the arm 207 is omitted and the driver annulus is connected to the deadlocking slide by a vertically elongated extension that extends along the rear end of the lock to at the upper end connect to the underside of the driver annulus by an extension pin-joint. The deadlocking slide is configured to displace a maximum distance (about 11  
20 MM) from the undisplaced to the deadlocking configuration. In forms where the extension pin-joint is defined by a vector having a radial distance and this vector is collinear with the vector defining the first pin joint and the former radial distance is smaller than the latter then a displacement by the deadlocking slide causes larger displacement of the driver slides, i.e. if the extension connect to the driver annulus at  
25 a distance closer to its axis of rotation than the first and second pin joint of the driver slides, then a given displacement of the deadlocking slide will cause a larger displacement of the drive slides.

In these forms of locks, the remote bolts are operated by actuation of the key and/or locking lever as is common in security door locks.

30 It should be stated in the context of this specification that a remote lock or remote engaging means or remote engaging member all include a simple plunger like member connected directly to a vertically elongated member that connects to a drive slide or a more sophisticated device where a remote bolt is actuated by an intermediated mechanism that in some cases includes a remote lock casing and in  
35 some cases includes means for separately deadlocking the remote bolt (said deadlocking being effected by displacement of the associated drive slide)

The above described locks are adaptable to provide a whole series of other locks where the **exterior lockable lever** can be independently locked from the interior by interior locking-lever can be simultaneously unlocked and unlatched by operation of the interior lever, [and this functionality can be transported into security door locks that include a deadlocking slide and a locking snib – as do most, and this functionality can also be imported into other suitable locks],

This functionality requires the lock to include an **exterior lockable lever 300** connected to an **outer unlatching cam 301** by an exterior shaft and an **interior lever** connected to an **inner unlatching cam** by an **interior shaft** each said unlatching cam preferably supported adjacently and each having both an unlatching arm and a drive arm as described above – importantly each is independently operable to retract the latch bolt and actuate the driver annulus described below. The driver annulus driven shoulders 206 and 205 are engageable by each drive arm 207 of the unlatching cams.

The spindle of the locking lever has passage through the lock body to mate within a **secondary-locking-cam 302** supported on the underside of the **exterior lever backplate 303**.

The deadlocking slide includes a ramped **unlocking shoulder 304** that is displaceable (by the locking lever) to a position immediately rear of the latch bolt as shown in Fig (corresponding to a **third locked configuration** corresponding to the second locked configuration described above) that is engageable by the latch bolt as it retracts to drive the deadlocking slide sufficiently towards the undisplaced position to enable the deadlocking slide to fully retract. The lock is configured such that, the position the deadlocking slide is displaced to by the bolt corresponds to an undisplaced locking cam 407 and undisplaced locking lever, a position corresponding to an unlocked exterior lever.

The locking lever is configured such that it cannot displace the deadlocking slide further than the third locked configuration described immediately above.

The specification provides a whole series of **deadlatching locks** based on those described above and where the locks have a **deadlatching latch bolt 410** that is automatically deadlocked each time it extends to the fully extended position. In these forms of the invention, the deadlocking slide is biased (by spring 409) towards and has free movement to displace to a deadlatching position shown in Fig 7 where the shoulder 400 of the deadlocking slide is directly rear of the latch bolt shoulder 401 restraining the latch bolt from being inwardly displaced. The unlatching rocker is adapted to include an undeadlocking nose portion 402 that is displaceable to slide up

a ramped portion 403 of the deadlocking slide to displace the shoulder 400 from the locus of movement of 401.

To facilitate this the rocker is outwardly biased by spring 404 that acts on the protruding pin 405 of the rocker to outwardly bias the latch bolt and the bolt recess 406 is enlarged to provide the rocker sufficient free movement to displace the shoulder 400 before the bolt starts inwardly displacing, and the ball recess 408 is vertically elongated as shown in Fig 7 to allow the slide to displace freely under the action of spring 409. As above, the position the deadlocking slide is displaced to by the rocker corresponds to an undisplaced locking cam 407 position corresponding to an unlocked exterior lever.

The secondary locking cam has an arm 305 connected to a stop blade 306 that has a leading end engageable in a stop slot 307 of a washer-like member 308 attached to the shaft of the exterior lever and each is configured such that if the locking lever (and spindle) are undisplaced, the exterior lever is unrestrained but if the deadlocking slide is in the second locking configuration, the stop blade is within the stop recess restraining the exterior lever against displacement. When the interior lever is pushed down to retract the bolt, the displacement of the bolt displaces the deadlocking slide to unlock the exterior lever. As will be appreciated, the exterior lever can also be unlocked by cylinder from either side, by locking lever and by slamming the door.

The above can be configured to provide locks having:

- 15 MM movement for both an upper and a lower drive slide
- drive slides operated by levers to ensure that higher forces can be delivered to the drive slides than can be delivered by common devices that employ key operation to drive the slides
- a bolt having 16 MM fully extended length
- a bolt of 14 MM width
- a casing of 17 MM width
- backset of 30 MM
- a casing depth of 40 MM
- levers that rotate downwardly (to unlatch) less than 45 degrees
- a casing of 150 MM
- a distance between cylinder and lever axis of 85 MM
- a bolt in the middle of the face plate
- interchangeable face plates

making it ideally suited to French doors.

The above can also be configured to suit security doors wherein

- the is bolt 10 MM width
- the casing is 15 MM width
- the backset is 28 MM

### **Forms of Strike Plates and Cylinders**

LOCKS further include a substantially conventional **strike plate** that is modified as shown in Fig 17, said strike plate comprising an aperture 130 engageable with the extended bolt and including a front aperture edge 131 against which the bolt pushes if one attempts to open a locked door. The aperture is within a substantially flat plate-like portion 132 extending from between a lower slot 133 to an upper slot 133 and connected to a blade 134 that preferably comprises an angled or curved blade. The blade is connected by bridges 135 of reduced cross-sectional area 156 and the strike is of a deformable material enabling these bridges to deform without cracking and the reduced area enables deformation to occur at reduced forces – these characteristics enabling the blade to be angularly displaced about an axis 157 that passes substantially through each bridge.

The bridges connect to fixable portions 158 that include apertures 159 through which screws shanks have passage and by which the fixable portion is attached to a doorjamb. In some types of deformation the fixable portions angularly displace about the screw – this displacement being afforded by the reduced strength of the bridge portion that deforms to accommodate such displacement.

The blade of this design supports the front edge and the blade is only attached at each end (by fixable portions) to the doorjamb thereby being deformable like a bow and at moderate forces.

The upper and lower extremes of the plate-like portion 132 (that portion between the aperture 130 and the slot 133), portions 140 are of reduced cross-sectional area to enable these portions to deform under low forces so as to deform as the blade portion angularly displaces – these portions engaging the face of the lock as the bridge portions deform to enable the blade to displace.

When a closed and locked door is urged open under the action of a jemmy placed adjacent the bolt, the bolt is forced against the front edge while the lock is simultaneously displaced away from the strike plate and in this case the bolt drags the front edge (while deforming the blade) with it to remain engaged – and in this

case the bridges may deform and move closer together (through rotation) to enable the blade to further deform to enable the front edge to further displace.

If the jemmy rests on the strike plate as it is rotated then this action causes the blade to angularly displace to deform the bridges. Typical deformation is as shown in Fig 21

When a closed and locked door is urged open under the action of a jemmy placed adjacent the bolt, the bolt is forced against the front edge while the lock is simultaneously displaced away from the strike plate in general and in this case the bolt drags the front edge (while deforming the blade) with it to remain engaged with it – and in this case the bridges may further deform and effectively move closer together (through rotation) to enable the blade to further deform to enable the front edge to further displace.

By this action the bolt is able to cause the strike plate front edge to displace with it whereby to maintain engagement between the bolt and strike plate while the screws attaching the strike plate to the door jamb are subjected to lower forces and are less likely to pull out than they would in a conventional strike plate]

The invention provides a first cam comprising part of a free-movement-cylinder that includes at least one compression spring between the cam and a barrel (located within an axial pocket of the cam) to urge the cam against (the opposed barrel or against its associated circlip or against an edge of the housing) to cause increased friction on the cam so that if the cam is displaced through engagement with another member, such as a deadlocking slide, it will come to rest soon after the deadlocking slide ceases to act – the friction acting contrary to the rotational inertia of the cam, alternatively the cylinder may include a compressed wave washer located between the cam and the adjacent circlip that retains the adjacent barrel; in either case what is important is that the cam is subject to frictional forces that gives rise to a moment that act to accelerate (negatively) a moving cam till it comes to rest and importantly, to come to rest while the cam arm is within the drive recess so that the lock does not become locked in the first locking mode]

**Complete locks (complying with common functionality requirements) and comprising a combination of the integers described above**

**Passage Lock, F75** latch bolt operated by lever from either side at all times – lock may employ a single rod. For deadlatching types the deadlocking slide is spring biased towards the third locked configuration.

**Privacy, F76 G2 and 3** deadlocking latch bolt operated by lever from either side except when levers are locked by locking lever (snib) on inside – lock may



employ a single rod. Unlocking by locking lever and by an exterior locking lever comprising a coin slot. From this lock we can derive another function by omitting the exterior coin slot. Both this latter function and F76 can operate remote locks. For deadlatching types the deadlocking slide is spring biased towards the third locked configuration.

**Fig 11, Patio, F77 G2 and 3** deadlocking latch bolt operated by lever from either side except when outside lever is locked by snib locking lever on inside. Automatic unlocking when inside lever is rotated or unlocked by locking lever. F76 can operate remote locks.

**Fig 12, Entrance, F 81** deadlocking latch bolt operated by lever from either side except when outside lever is locked by locking lever on inside. When outside lever is locked, latch bolt retracted by key in exterior cylinder or rotating interior lever. Locking lever must be operated to unlock exterior lever. F 81 can be modified to operate remote locks – in which case the secondary slide includes a recess to accept a return shoulder of a wire as shown in Fig 3 or a rod as shown in Fig 8 and the stop slide is similarly adapted as shown in Fig 2.

**Fig 13, Entrance, F82 G 1** deadlocking latch bolt operated by lever from either side except when outside lever is locked by locking lever on inside. When outside lever is locked, operating key in exterior cylinder or rotating interior lever unlocks the exterior lever. F82 can be modified to operate remote locks – in which case the secondary slide includes a recess to accept a return shoulder of a wire as shown in Fig 3 or a rod as shown in Fig 8 and the stop slide is similarly adapted. Alternatively the lock may include a top rod joiner connected to the extension, said joiner including a recess as shown in Fig 6 to accept a upper rod return portion as shown in Fig 8.

**Fig 14, Classroom, F84** deadlocking latch bolt operated by lever from either side except when outside lever is locked by key from exterior. When outside lever is locked, latch bolt retracted by rotating interior lever or by unlocking exterior lever by key and then operating exterior lever. F84 can be modified to operate remote locks – in which case the secondary slide includes a recess to accept a return shoulder of a wire as shown in Fig 3 or a rod as shown in Fig 8 and the stop slide is similarly adapted as shown in Fig 2.

**Fig 15, Store, F86** outside knob is fixed and bolt retracted by key or operating interior lever

**Fig 16, Store, F91** deadlocking latch bolt operated by lever from either side except when both levers are locked by key from either side.

**Other complete locks comprising a combination of the integers described above**

**Fig 7, Security or French Door, AL100** with provision to connect to upper and lower remote locks by a vertically displaceable members ("control member") that displace simultaneously in the same direction, in some cases comprising rods but preferably comprising inner Bowden cables where the outer cable portion is preferably attached to the casing. The upper control member attaches to a recess in the stop slide while the lower drive member attaches to a recess in the secondary slide which is actuated by the deadlocking slide that in turn is actuated by locking lever or the key operable cylinder.

Where these lock include the extension 90 and the lock is in the second locked mode, operation of the interior lever a) unlatches the bolt while b) displacing the control members to retract the bolts of remote locks while c) unlocking the exterior lever. If the lock is in the first locked mode it must be unlocked by key (interiorly or exteriorly) before either lever can be operated to unlatch the bolt. Where the extension 90 is omitted and the lock is in the first locked modes it must be unlocked by key but if it is in the second locked modes it it can be unlocked by either key or locking lever.

Where the stop slide comprises a stop joiner, independent locking of the exterior lever is not possible and the lock is locked as a result of the deadlocking slide engaging with the bolt and in these cases the extension is omitted.

**Fig 8, Security or French Door, AL200** with provision to connect to upper and lower remote locks by a vertically displaceable members ("control member") that displace simultaneously in the same direction, in some cases comprising cables but preferably comprising rods. The upper control member attaches to a recess in the top rod joiner while the lower control member attaches to a recess in the secondary slide which is actuated by the deadlocking slide that in turn is actuated by locking lever or the key operable cylinder and because the extension and secondary slide move simultaneously in opposite diections, so does the secondary slide and top joiner.

Where these lock include the extension 90 and the lock is in the second locked mode, operation of the interior lever a) unlatches the bolt while b) displacing the control members to retract the bolts of remote locks while c) unlocking the exterior lever. If the lock is in the first locked mode it must be unlocked by key (interiorly or exteriorly) before either lever can be operated to unlatch the bolt. Where the extension 90 is omitted and the lock is in the first locked modes it must be unlocked by key but if it is in the second locked modes it it can be unlocked by either key or locking lever.

Where the stop slide comprises a stop joiner, independent locking of the exterior lever is not possible and the lock is locked as a result of the deadlocking slide engaging with the bolt and in these cases the extension is omitted.

**The Claims defining the Invention Are:**

**1** A lock for a displaceable wing including means to operate at least one remote bolt,

a lock body including a **bolt** by which to restrain the wing from being moved in an opening direction, an operable **lever** by which to retract the bolt and an angularly displaceable **unlatching cam** to operably connect the bolt to the lever,

an angularly displaceable **driver member** by which to operably connect the at least one remote engaging means to the lever,

said driver member being operably associated with the unlatching cam and displaceable by the unlatching cam to operate the remote bolt.

'5 A lock according to Claim 1, including **deadlocking means** to restrain the bolt in the fully extended position.

'6 A lock according to Claim 5, wherein the driver member is restrained by the deadlocking slide when in the deadlocking position

'7 A lock according to Claim 1, including **locking means** to restrain the deadlocking means

**14** A lock for a displaceable wing including means to operate at least one remote bolt,

an operable **lever**, a lock body including an angularly displaceable **unlatching cam** operably connected to the lever,

an angularly displaceable **driver member** by which to operably connect the at least one remote bolt to the lever,

said driver member being operably associated with the unlatching cam and displaceable by the unlatching cam to operate the remote bolt.

'12 A lock according to any one of Claim 21 to 24, including deadlocking means to restrain the driver member

**21** A lock for a displaceable wing including means to operate at least one remote bolt,

a lock body including a **bolt** to restrain the wing from being moved in an opening direction, an operable **lever** by which to retract the bolt and an angularly displaceable unlatching cam to operably connect the bolt to the lever, **locking**

means, an angularly displaceable **driver member** by which to operably connect the at least one remote engaging means to locking means.

'22 A lock according to Claim 21, including **deadlocking means** to restrain the bolt in the fully extended position.

'23 A lock according to Claim 22, wherein the deadlocking means includes locking means to restrain the driver annulus in the fully displaced position.

'24 A lock according to Claim 23, wherein the drive annulus is restrained by the deadlocking slide when in the deadlocking position

'24B A lock according to Claim 23, wherein the driver annulus is connected to the deadlocking slide by a vertically elongated extension that extends along the rear end of the lock to at the upper end connect to the underside of the driver annulus by an extension pin-joint.

'24C A lock according to Claim 24B, where the extension pin-joint is defined by a vector having a radial distance and this vector is collinear with the vector defining the first pin joint and the former radial distance is smaller than the latter then a displacement by the deadlocking slide causes larger displacement of the driver slides.

'24D A lock according to Claim 23C, wherein the remote bolts are operated by actuation of the key and/or locking lever

'31 A lock for a displaceable wing including means to operate at least one remote bolt,

a lock body including an operable **lever** by which to retract the bolt and an angularly displaceable unlatching cam to operably connect the bolt to the lever, **locking means**, an angularly displaceable **driver member** by which to operably connect the at least one remote engaging means to locking means.

'32 A lock according to Claim 21, wherein the locking means includes locking means to restrain the driver annulus in the fully displaced position.

33 A lock according to Claim 23, wherein the drive annulus is restrained when the deadlocking slide when in the deadlocking position

5 '33B A lock according to Claim 32, wherein the driver annulus is connected to the deadlocking slide by a vertically elongated extension that extends along the rear end of the lock to at the upper end connect to the underside of the driver annulus by an extension pin-joint.

10 '33C A lock according to Claim 33B, where the extension pin-joint is defined by a vector having a radial distance and this vector is collinear with the vector defining the first pin joint and the former radial distance is smaller than the latter then a displacement by the deadlocking slide causes larger displacement of the driver slides.

15 '33D A lock according to Claim 33C, wherein the remote bolts are operated by actuation of the key and/or locking lever

20 41 A lock according to any one of the above claims, wherein the axis of rotation of the unlatching cam and driver member are separated by a distance not exceeding the effective radius of the driver member

25 '42 A lock according to any one of the above claims, including an upper and a lower drive slide operably connected to the driver member, each located towards the rear of the casing and each displaceable simultaneously in the opposite direction.

'43 A lock according to any one of the above claims, wherein the driver member comprises a driver annulus.

30 '44 A lock according to any one of the above claims, wherein the locking means includes a locking lever.

'45 A lock according to any one of the above claims, wherein the locking means includes a cylinder.

35 '46 A lock according to any one of the above claims, wherein the deadlocking means includes a deadlocking slide displaceable by both the locking lever and by the cylinder of the locking means

'47 A lock according to Claim 45, wherein the cylinder comprises a double cylinder.

5 '48 A lock according to Claim 45, wherein the cylinder comprises a double cylinder.

'49 A lock according to Claim 43, wherein the cylinder comprises a free-rotation-cylinder

10

'50 A lock according to Claim 49, wherein the deadlocking slide is operably connected to the locking lever by a spindle that is and angularly displaceable locking cam supported in the casing, said locking cam having a sideways protruding arm 81 that engages in a horizontal slot 82 in the deadlocking slide.

15

'51 A lock according to Claim 50, wherein the lock is characterized by:  
a **second mode** characterized by the first cam arm being within the drive recess and the deadlocking slide having been displaced into the deadlocking configuration by the locking lever or by the first arm (the first arm being operably connected to a cylinder);

20

a **first mode** characterized by the deadlocking slide fully displaced into the deadlocking configuration and the first cam arm displaced from within the drive recess (the first arm being operably connected to a cylinder) to restrain the deadlocking slide fully displaced in the deadlocking configuration from which the deadlocking slide cannot be displaced by the locking lever.

25

a **third mode** characterized by the first cam arm being within the drive recess and the deadlocking slide having been displaced into the deadlocking configuration by the locking lever or by the first arm (the first arm being operably connected to a cylinder) and the exterior lever restrained against displacement.

30

'52 A lock having a first and second locked configuration according to any one of the above claims, wherein the deadlocking slide supports a spring loaded ball that is engageable in recesses in the side of the casing corresponding to an undisplaced slide and a deadlocked slide in the second deadlocking configuration, said slide when the slide in the first deadlocking configuration being biased towards the second.

35

'53 A lock having a first and third locked configuration according to any one of the above claims, wherein the deadlocking slide supports a spring loaded ball that is engageable in recesses in the side of the casing corresponding to an undisplaced slide and a deadlocked slide in the second deadlocking configuration, said slide  
5 when the slide in the first deadlocking configuration being biased towards the second.

'54 A lock according to any one of the above claims, wherein the lever and unlatching cam are located above the latch bolt, said bolt being operably connected to the unlatching cam by an intermediate rocker member having an operating arm.  
10

'55 A lock according to any one of the above claims, wherein the bolt comprises a latch bolt and the lock is characterized by a pre-latching configuration

'56 A lock according to Claim 55 wherein the latch bolt has a leading  
15 curved, chamfer or otherwise profiled sides to facilitate or assist latching wherein the latch bolt is engageable on either side by a strike plate to be inwardly displaced by the strike plate during latching whereby to be and suitable both left hand and right hand hinged doors.

'57 A lock according to Claim 55, including an auxiliary bolt and a pseudo-deadlocking slide, wherein in the pre-latching configuration the slide restrains the latch bolt from displacing outwardly from a partly extended position and wherein inwards displacement of the auxiliary causes the pseudo-slide to move from the locus of movement of the bolt  
20

'58 A lock according to Claim 55, wherein the auxiliary bolt is profiled on both sides to accommodate both left hand and right hand doors that has curved, chamfer or otherwise profiled sides to facilitate or assist latching wherein the latch bolt is engageable on either side by a strike plate to be inwardly displaced by the strike  
30 plate during latching whereby to be and suitable both left hand and right hand hinged doors.

'59 A lock according to Claim 54, wherein the unlatching cam is connected by shaft to operating lever, said unlatching cam having a downwardly extending unlatching arm that has towards the free end a driving shoulder displaceable in a  
35 forward direction by downwards lever operation to rotate the rocker in an anti-clockwise direction to cause the bolt to retract. .



'60 A lock according to any one of the above claims, wherein the lock body includes a casing of small depth, small width and small length.

5 '61 A lock according to any one of the above claims, including drive means to operate a) a remote lock that is operated by a vertically elongated drive member that connects to one or other of the drive slides of the lock and b) an upper and lower remote lock each operated by a single vertically elongated drive member that runs from one to the other and is connected to a drive slide of the lock and an upper and lower remote lock each operated by a separate drive slide each connected by a  
10 separate vertically elongated drive member.

'62 A lock according to Claim 61, wherein the drive member in one form comprises a rod with ends adapted to be connected to a drive slide said adaption in one form comprising a right angle return portion; in another form comprises an inner Bowden cable with an end adapted to be connected to a drive slide said adaption in one form comprising a right angle return portion  
15

'63 A lock according to any one of the above claims, wherein the driver member at radial distance from its pivotal axis is operably connected to an upper drive slide 221 by a first pin-joint (providing relative angular displacement between the driver and slide) comprising a pin free within the slide and embedded in the driver member, or  
20

'64 A lock according to any one of the above claims, wherein the driver member at radial distance from its pivotal axis is operably connected to an upper drive slide 221 by a first slide-joint comprising a protruding pin of the driver member within a substantially horizontal slot of the drive slide. In some forms, the drive member is connected to a lower drive slide by a second pin-joint or by a second slide-joint.  
25

30 '65 A lock according to any one of the above claims, wherein the first and second joint are on opposite sides of the drive pivotal axis with one being rearwardly disposed while the other is forward disposed, and preferably the first joint is rearwardly dispose. .  
35

'65 A lock according to any one of the above claims, wherein the first and second joint are on opposite sides of the driver member with one being adjacent one side of the casing and the other adjacent the other.

5 '66 A lock according to any one of the above claims, wherein the radial distance between the pin of the first pin-joint and pivotal axis, defined as the effective radius is substantially the same the radial distance between the pin of the second pin-joint and pivotal axis and preferably the radial distance between the pins of the slide-joints and pivotal axis is also substantially the same as the effective radius.

10 '67 A lock according to any one of the above claims, the **pivotal** of the unlatching cam and lever is parallel to and separate from the pivotal axis of the driver member by less than the effective radius of the driver member and in a preferred form of the invention the cylindrical portions of the unlatching cam are supported in apertures in  
15 the casing side walls said apertures being within a circumference defined by the effective radius and where the driver member takes the form of an annulus, the unlatching cam is within the outer circumference of the driver member.

20 '68 A lock according to any one of the above claims, wherein the driver member has two drive driven shoulders that are engageable by a drive arm comprising a radially extension of the drive cam and they are spaced such that when the driver member is undisplaced and the lever is undisplaced, the drive arm abuts and when the lever is lifted to fully displace the driver member (to operate [latch] remote locks) the arm engages and displaces it downwardly to a limit and when the lever is then  
25 returned to the undisplaced position arm abuts shoulder- and wherein when the lock is unlatched by pushing the lever down the arm drives to the undisplaced position (to operate [unlatch] remote locks). Importantly the fully retracted latch bolt coincides with an undisplaced driver member.

30 '69 A lock according to any one of the above claims, wherein both drive slides are towards the rear of the casing, the second pin of the pin-joint is connects an intermediate member to the driver member. Intermediate member is connected by a third pin-joint to a rocker that extends from a fourth pivotal joint located forward of the casing to terminate in a free end rear of the casing, said free end including a fifth pin-joint shared with an alternative lower drive slide that extends towards the lower end  
35 of the casing and preferably passing behind the locus of the bolt.

'70 A lock according to any one of the above claims, wherein *rotation of the annulus in a locking direction (anti-clockwise) by lifting the lever drives upwardly (to extend a remote bolt) and the member downwardly by causing the intermediate member to pull the rocker downwardly (to extend a remote bolt).*

5

'71 A lock according to Claim 70, wherein the upper and lower drive slides displace simultaneously in opposite directions and preferably the total displacement of each is identical (although at any intermediate position this may not be so) and so preferably the lengths of the intermediate member, the length of the rocker and the location of the joints are configured to provide such and wherein rotation of the driver member in a unlocking and unlatching direction (clockwise) by lowering the lever (to retract the latch bolt) also drives the member upwardly and downwardly (to retract remote bolts).

10

'72 A lock according to any one of the above claims, wherein the deadlocking slide is connected to a vertically elongated locking slide that has a locking end that is displaceable into a recess of the driver annulus to restrain it from displacing from the displaced position corresponding to extended remote bolts, said restrained configuration corresponding to a first locked or second locked configuration of the lock [and in a lock having a first and third locked configuration, to a first locked configuration]

15

20

'73 A lock according to any one of the above claims, configured for the non-opening door (second door) of a pair of French doors in which the latch bolt and auxiliary bolt are omitted and there is only one or a pair of remote bolts operated by a lever and wherein, the casing is adapted to include an outwardly biased plunger comprising a second auxiliary bolt that when depressed engages in a peripheral recess of the driver annulus to restrain it from displacing from the displaced position corresponding to extended remote bolts, and wherein this second auxiliary bolt is depressed when the first door is closed wherein the faceplate of the first door slides over the second auxiliary bolt to depress it.

25

30

'74 A lock according to any one of the above claims, including recesses within the side of the driver annulus, a ball biased towards the annulus by spring, said ball at dispositions corresponding to a fully displaced and undisplaced configuration of the annulus being displaced into the recess to releasably restraining the annulus

35

'75 A lock according to any one of the above claims, including a lower secondary slide that is connected by a pin-joint to the lower drive slide and this secondary slide has upper and lower sideways protruding pins that slide within slots in the casing sides – said slide having an aperture to receive the return portion of a lower rod or a  
5 an aperture to receive a return portion of a lower Bowden cable.

'76 A lock according to any one of the above claims, *wherein the upper drive slide is supported between substantially vertical walls of an extension to the component defines a portion of the annulus side wall, said upper drive slide at its upper end*  
10 *having an aperture to receive the return portion of an upper rod or an aperture to receive a return portion of an upper Bowden cable.*

'77 A lock according to Claim 75, wherein the secondary slide is connected to the first drive pin by an elongated member preferably comprising a rod.  
15

'78 A lock according to any one of the above claims, wherein when the bolt is restrained by the deadlocking slide, the rocker cannot be displaced so the lever cannot be operated downwardly.

'79 A remote lock according to any one of the above claims comprises a remote engaging means and a remote engaging member and a remote bolt including a simple plunger like member connected directly to a vertically elongated member that connects to a drive slide, and a remote bolt actuated by an intermediated mechanism including a remote lock casing and in includes means for separately deadlocking the  
20 remote bolt wherein said deadlocking is preferably effected by displacement of the associated drive slide.  
25

'80 A lock according to any one of the above claims, including a **bolt by which to restrain the wing from being moved in an opening direction, an interior lever**  
30 **and an exterior each operable to retract the bolt and an outer and an inner angularly displaceable unlatching cam to operably connect the bolt to the levers,** deadlocking means includes means to restrain the bolt in the fully extended position including a locking lever and a deadlocking slide engageable with the bolt, said lock being lockable to a third locked configuration where the exterior lever is  
35 restrained from displacement and the interior lever is free to rotate to displace the inner unlatching cam to displace the bolt towards the retracted position to as a consequence unlock the exterior lever.

'81 A lock according to Claim 80, wherein the deadlocking slide is displaceable by bolt displacement to displace the locking cam to unlock the exterior lever

5 '82 A lock according to Claim 81, wherein the exterior lever is supported in an exterior lever plate that also supports a secondary locking cam having an arm, said arm being connected by pin-joint to a vertically elongated stop member having a stop blade engageable in a stop recess of a disc-like member coupled to the exterior lever

10 '83 A lock according to Claim 80, wherein the deadlocking means includes a cylinder.

'84 A lock according to Claim 80, wherein the deadlocking means includes a deadlocking slide displaceable by both the locking lever and by the cylinder

15

'85 A lock for a displaceable wing including a bolt by which to restrain the wing from being moved in an opening direction, an interior lever and an exterior each operable to retract the bolt and an outer and an inner angularly displaceable unlatching cam to operably connect the bolt to the levers,

20 deadlocking means includes means to restrain the bolt in the fully extended position including a locking lever and a deadlocking slide engageable with the bolt, said lock being lockable to a third locked configuration where the exterior lever is restrained from displacement and the interior lever is free to rotate to displace the inner unlatching cam to displace the bolt towards the retracted position to as a

25 consequence unlock the exterior lever.

'86 A lock according to Claim 85, wherein the deadlocking slide is displaceable by bolt displacement to displace the locking cam to unlock the exterior lever

30 '87 A lock according to Claim 86, wherein the exterior lever is supported in an exterior lever plate that also supports a secondary locking cam having an arm, said arm being connected by pin-joint to a vertically elongated stop member having a stop blade engageable in a stop recess of a disc-like member coupled to the exterior lever

35 '88 A lock according to Claim 85, wherein the deadlocking means includes a cylinder.

'89 A lock according to Claim 80, wherein the deadlocking means includes a deadlocking slide displaceable by both the locking lever and by the cylinder

5 '90 A lock including a deadlatching bolt that is automatically deadlocked by the deadlocking slide each time it extends to the fully extended position

'91 A lock according to any one of claims 1 to 89 and 90

10 '100 A lock including a lockable exterior hand operable lever that is lockable by an interior locking lever that simultaneously displaces a deadlocking side to a deadlocking position, said deadlocking slide being displaceable by the latch bolt when actuated by the unlatching rocker when displaced by the exterior lever, said lock being configured such that an undisplaced deadlocking slide corresponds to an undisplaced locking lever and an unlocked exterior lever.

15

101 A lock according to any one of claims 1 to 91 and 100

20 '110 A lock according to Claim 91, wherein said deadlocking slide is displaceable by operation of a lever to displace the unlatching rocker whereby to unlock the exterior lever.

25

'90 A lock according to the Figures attached

30

30

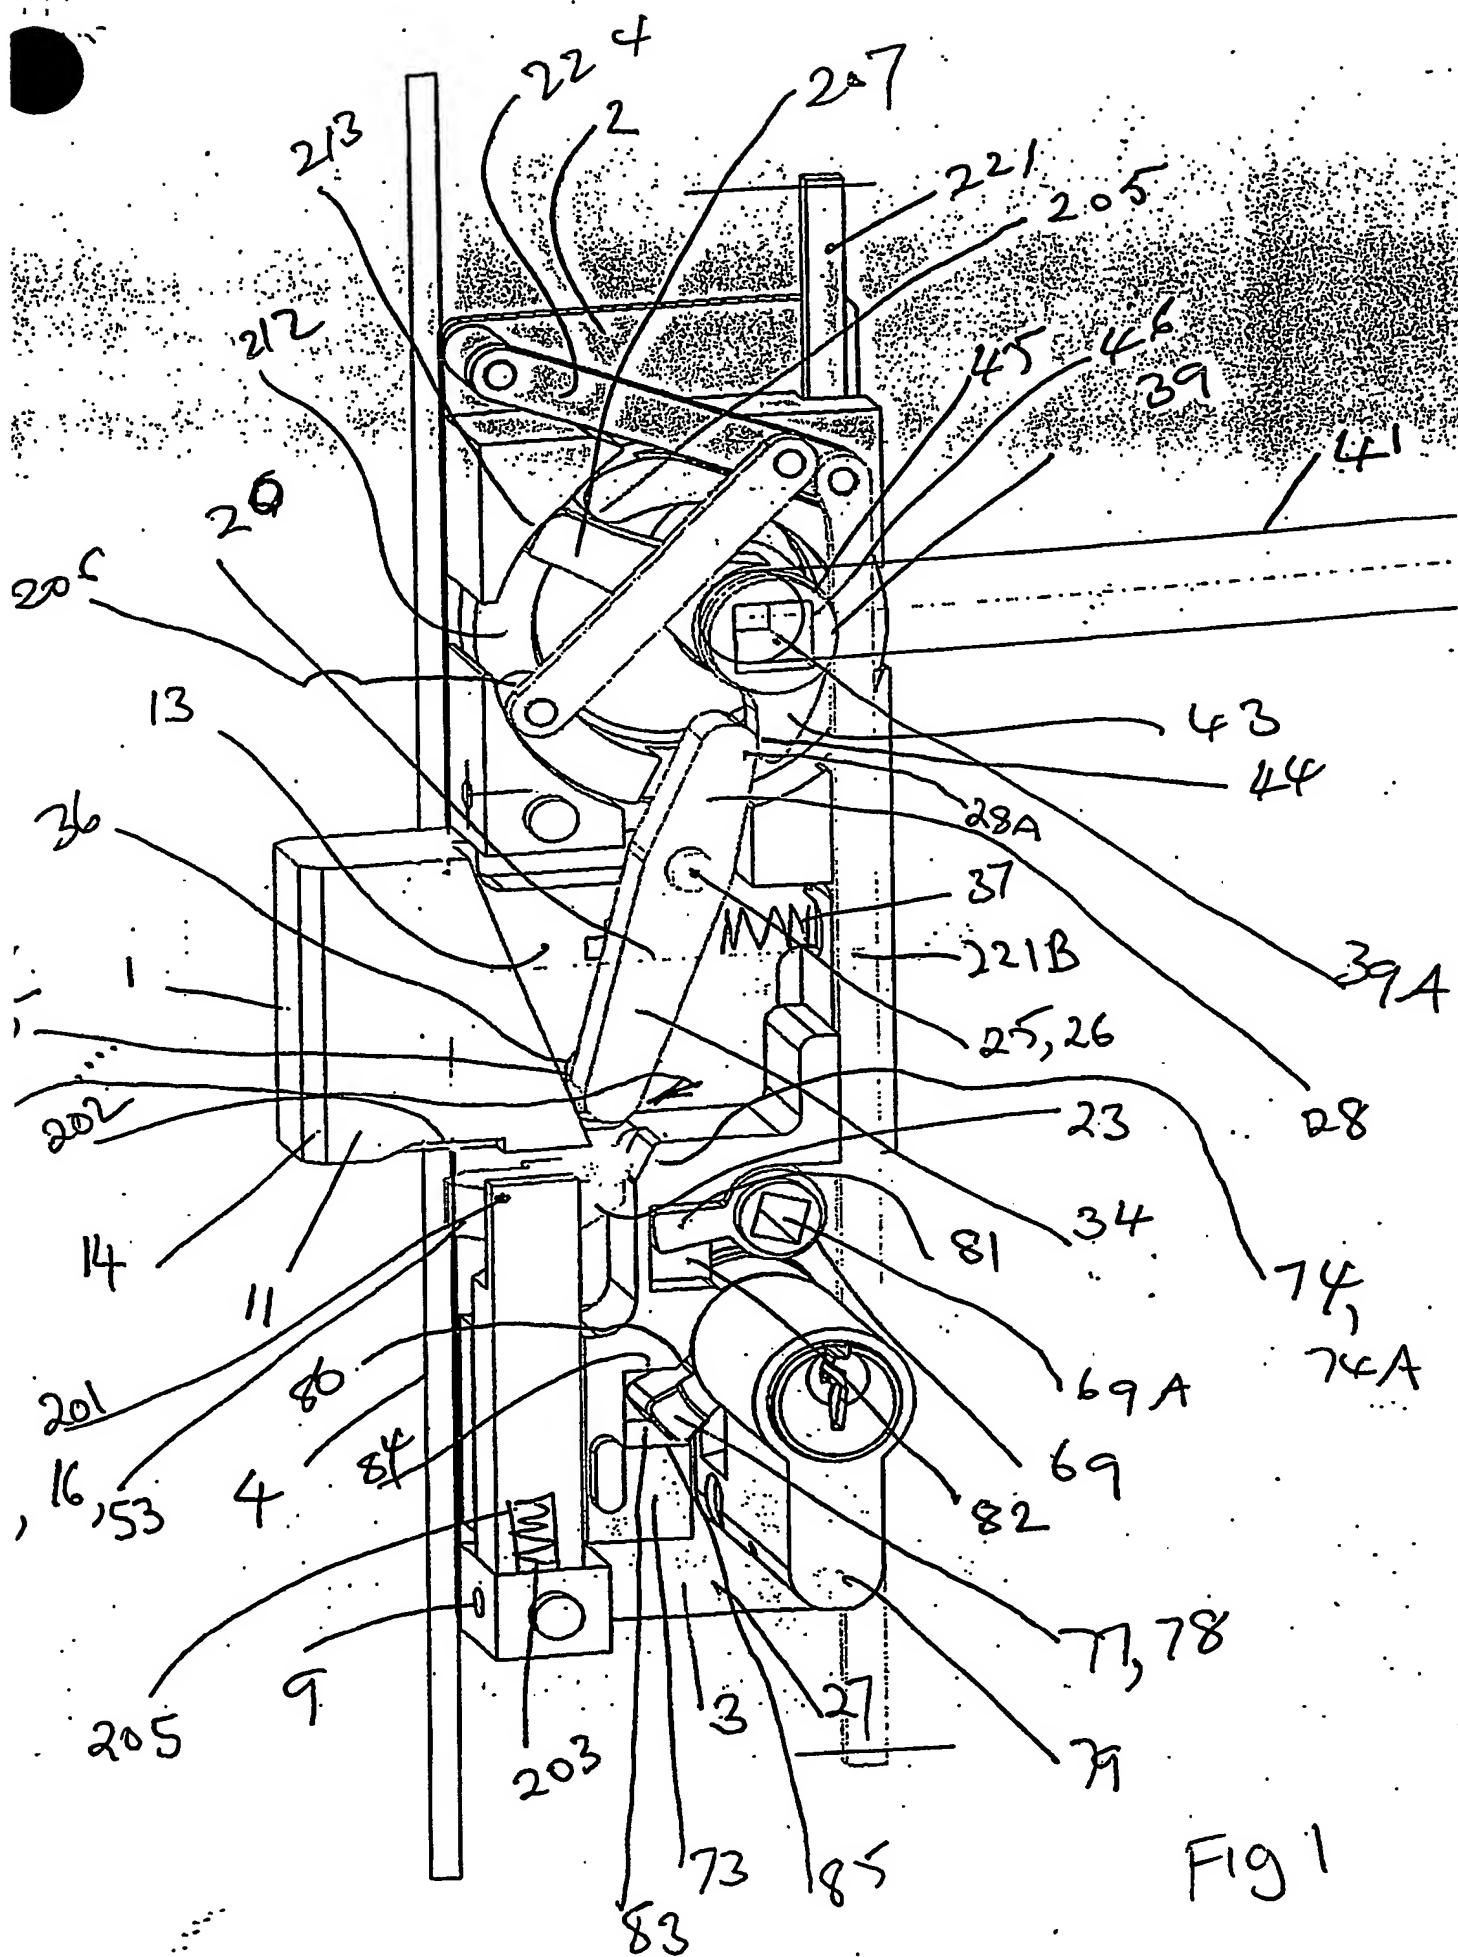


Fig 1

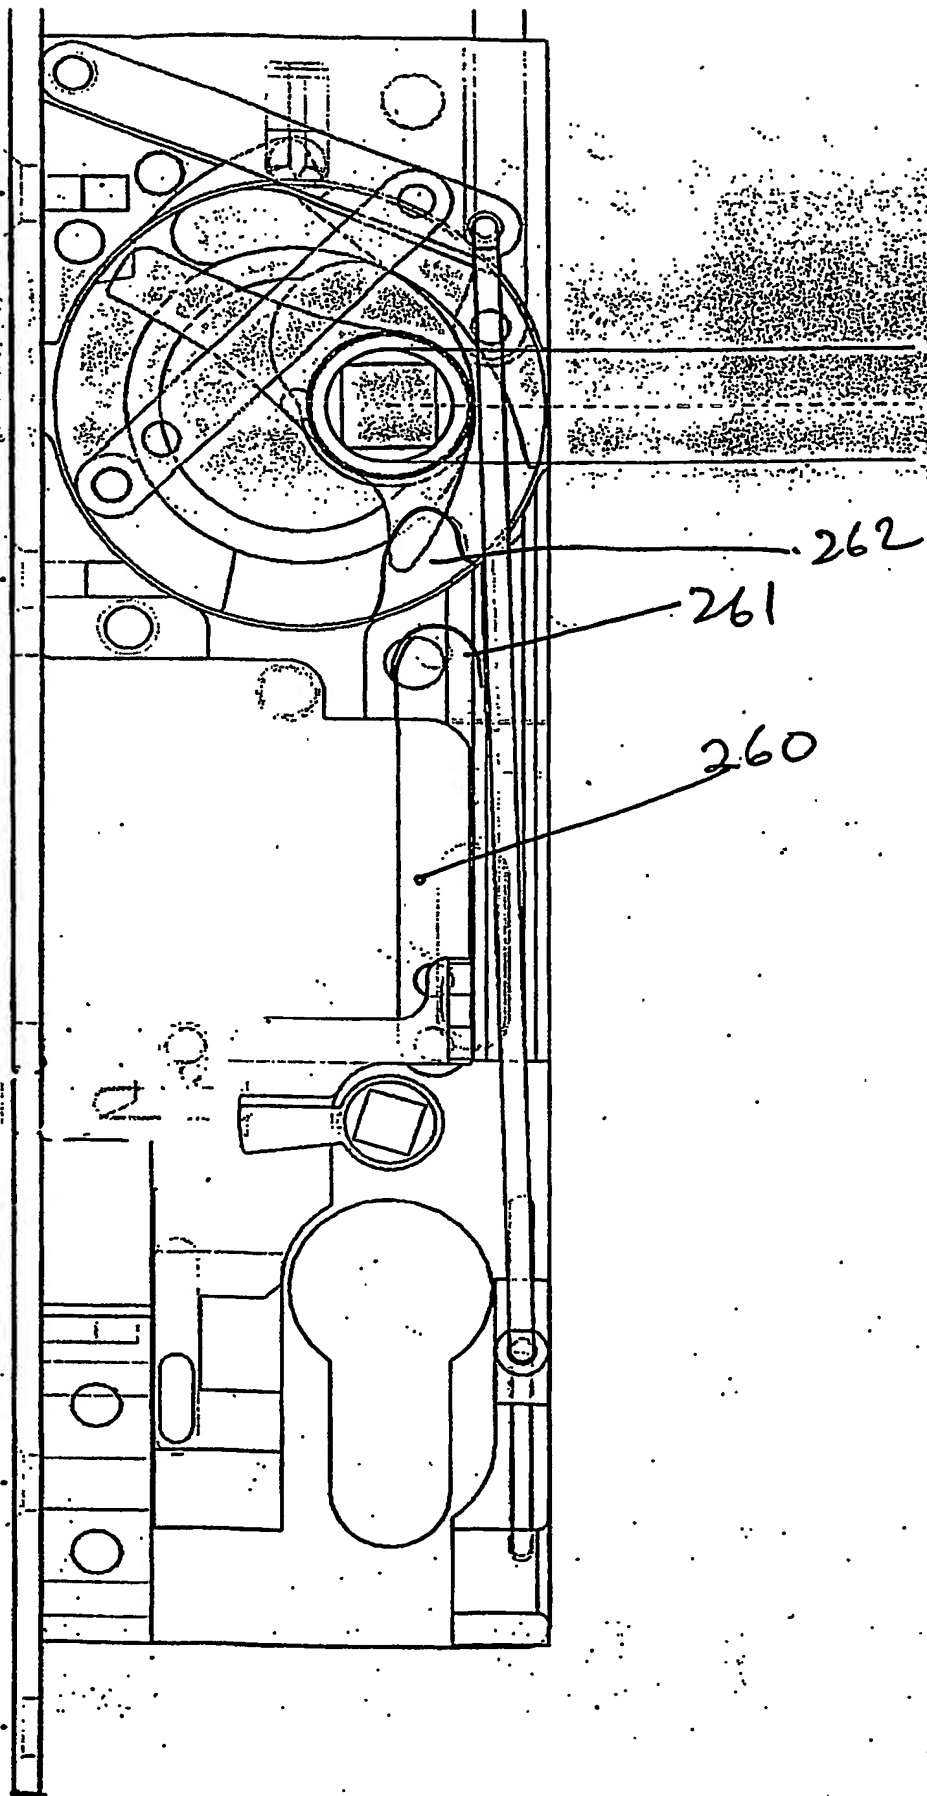


Fig 2



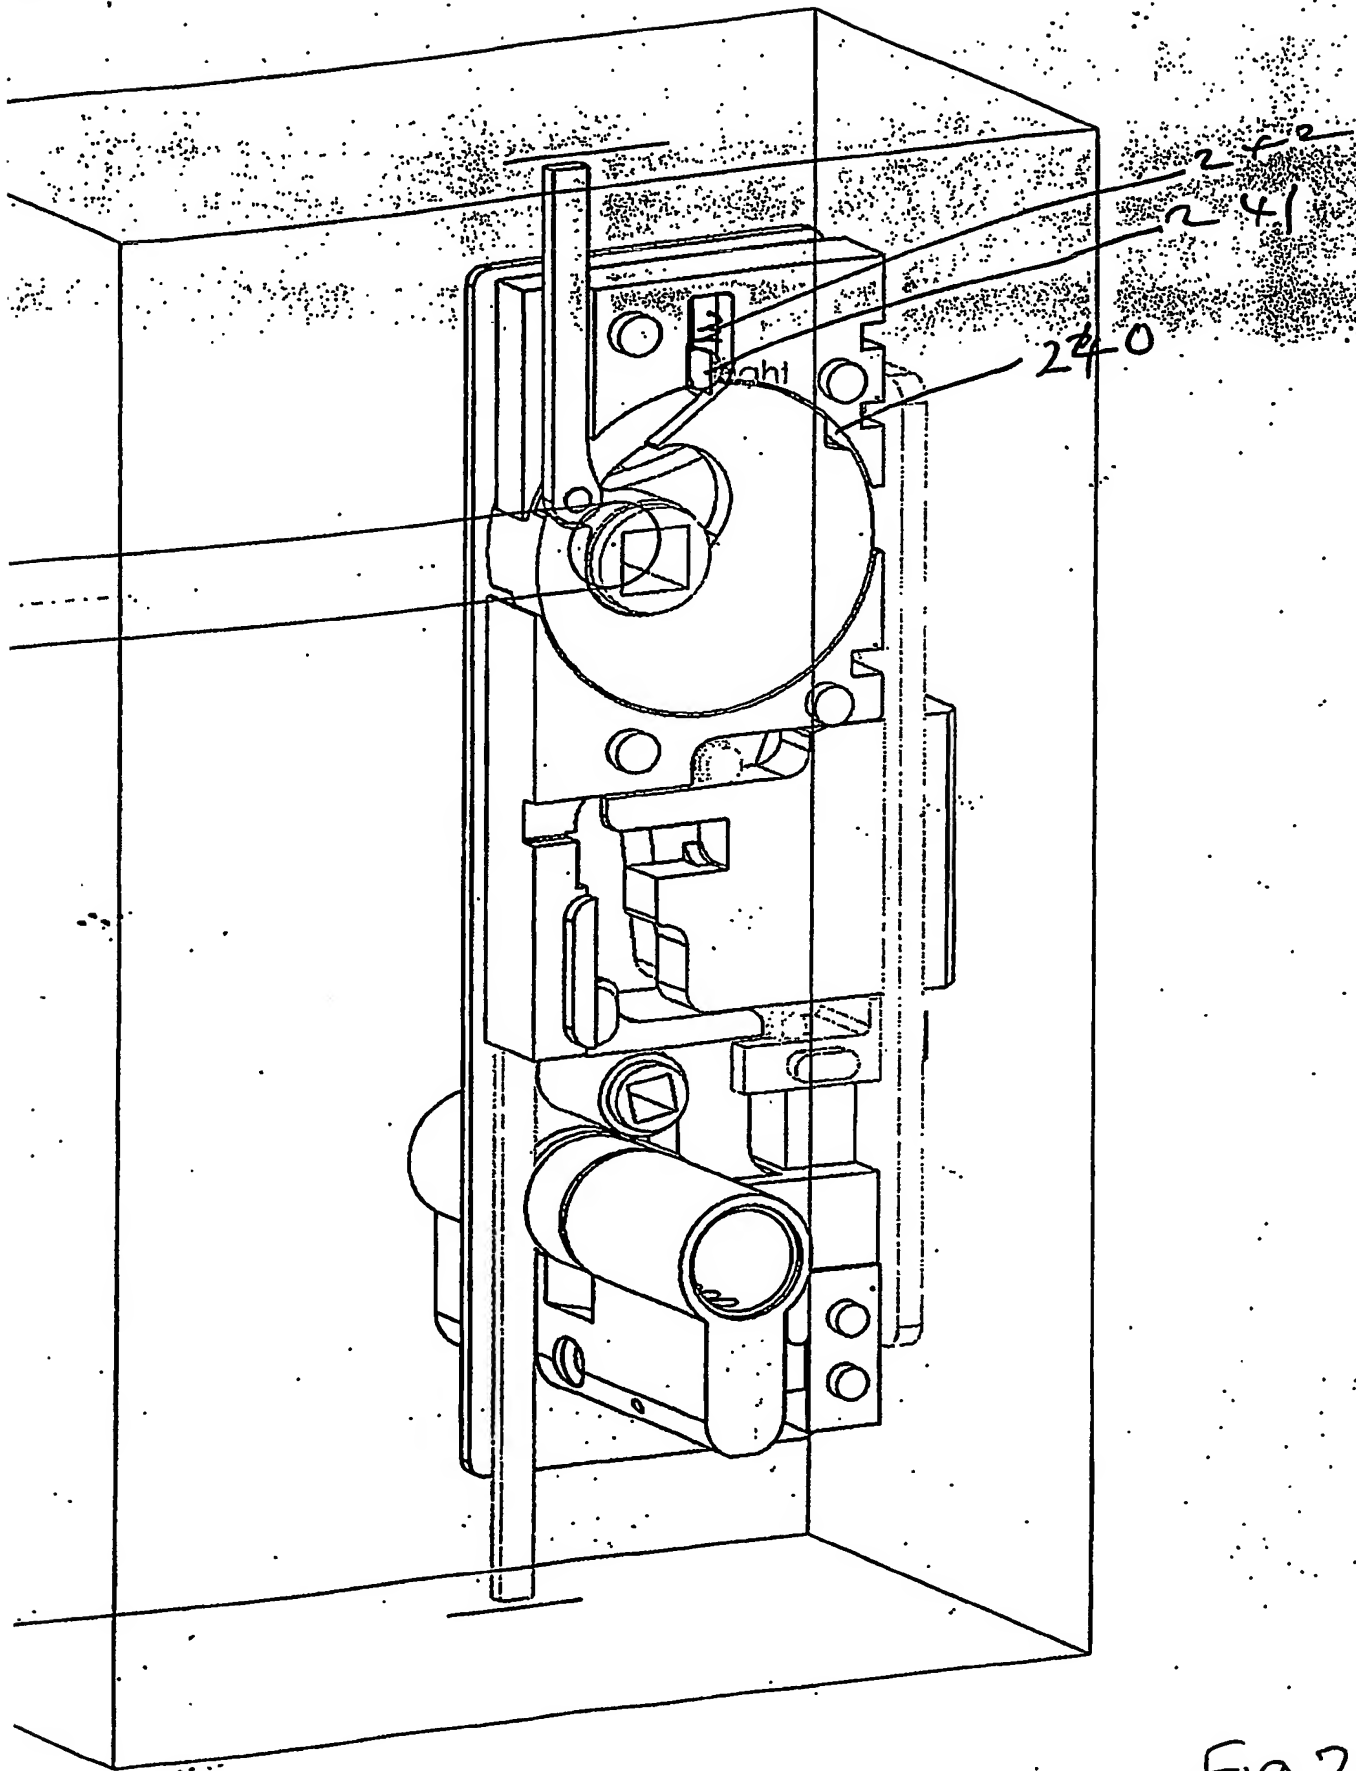


Fig 3



1300 DSV.DRG.A4


TIX  
HINGE

MOVE UP  
FACE PLATE

USE  
SMALL  
SCREWS

MAKE SURE  
THERM IS EXHAUST  
ROOM

Fig 4

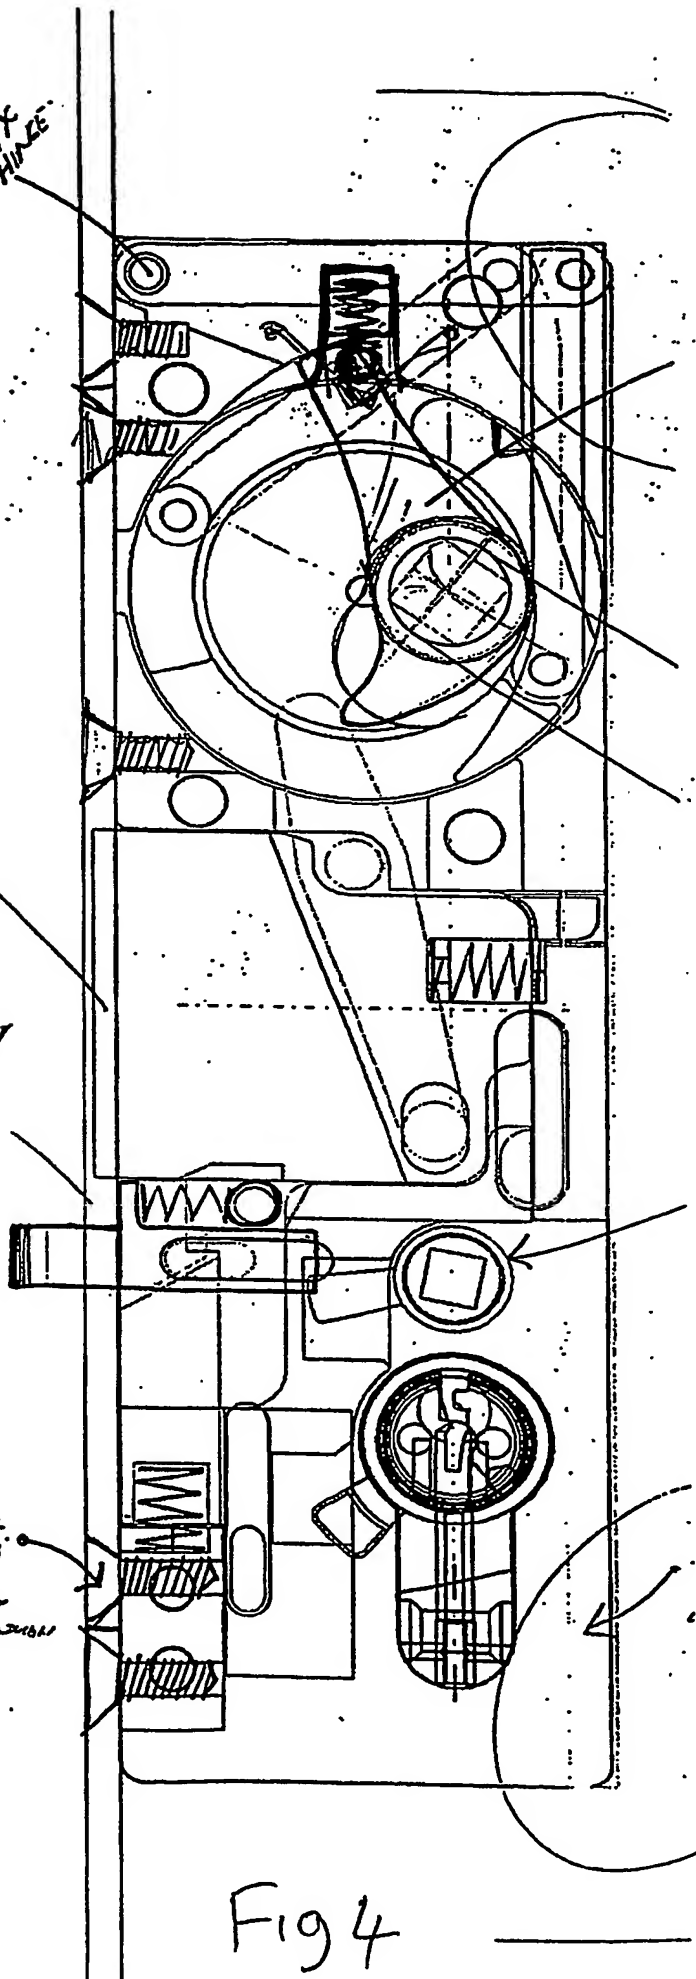

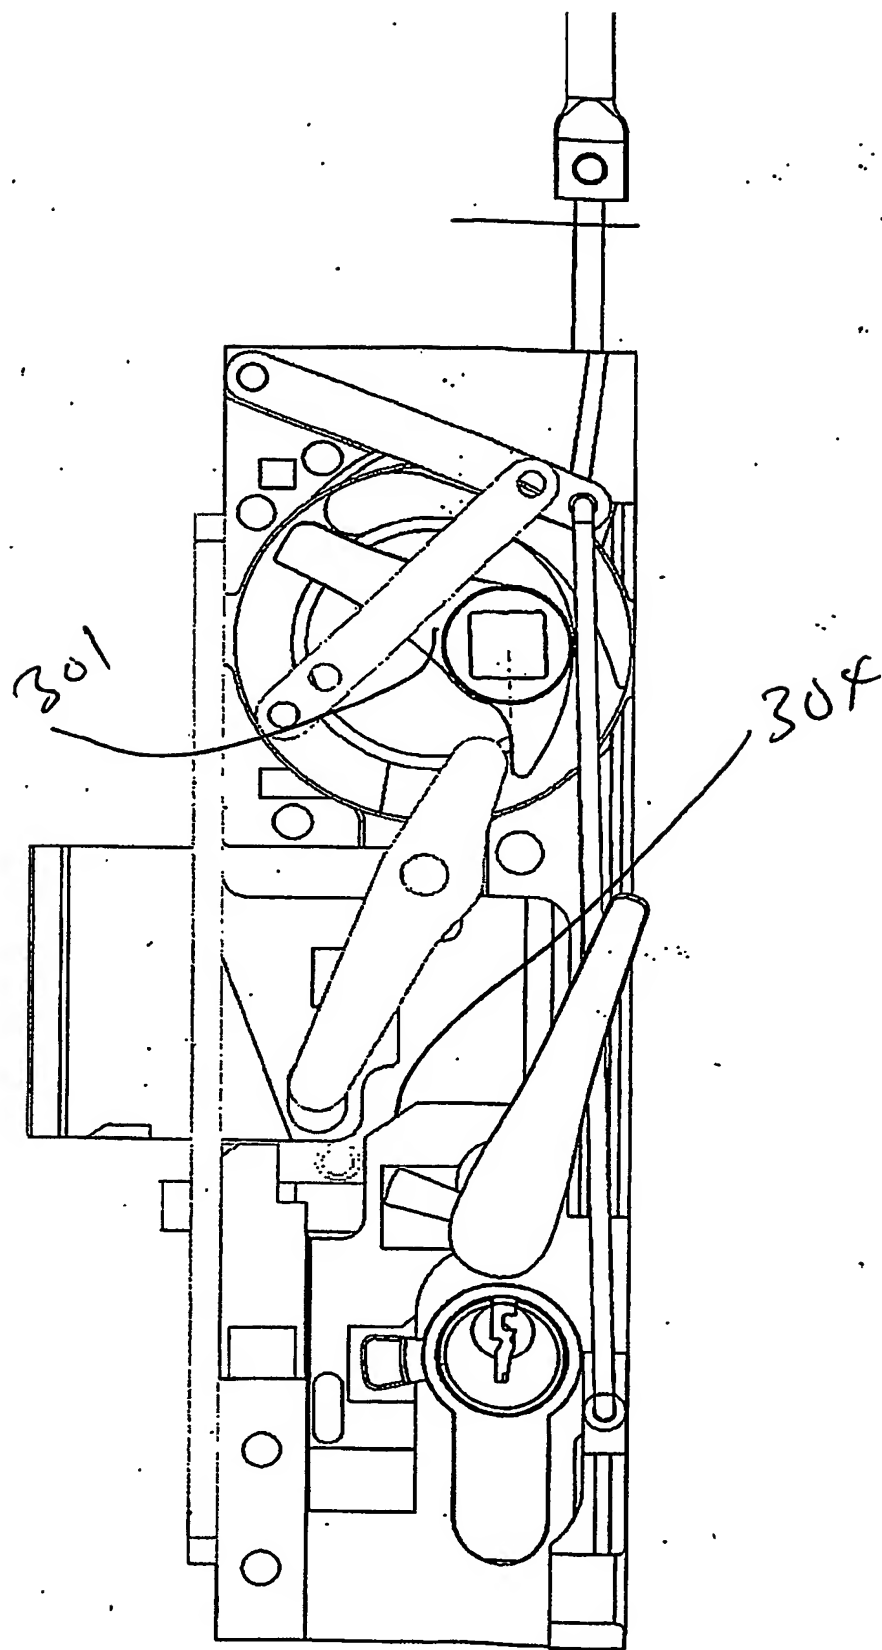


Fig 5

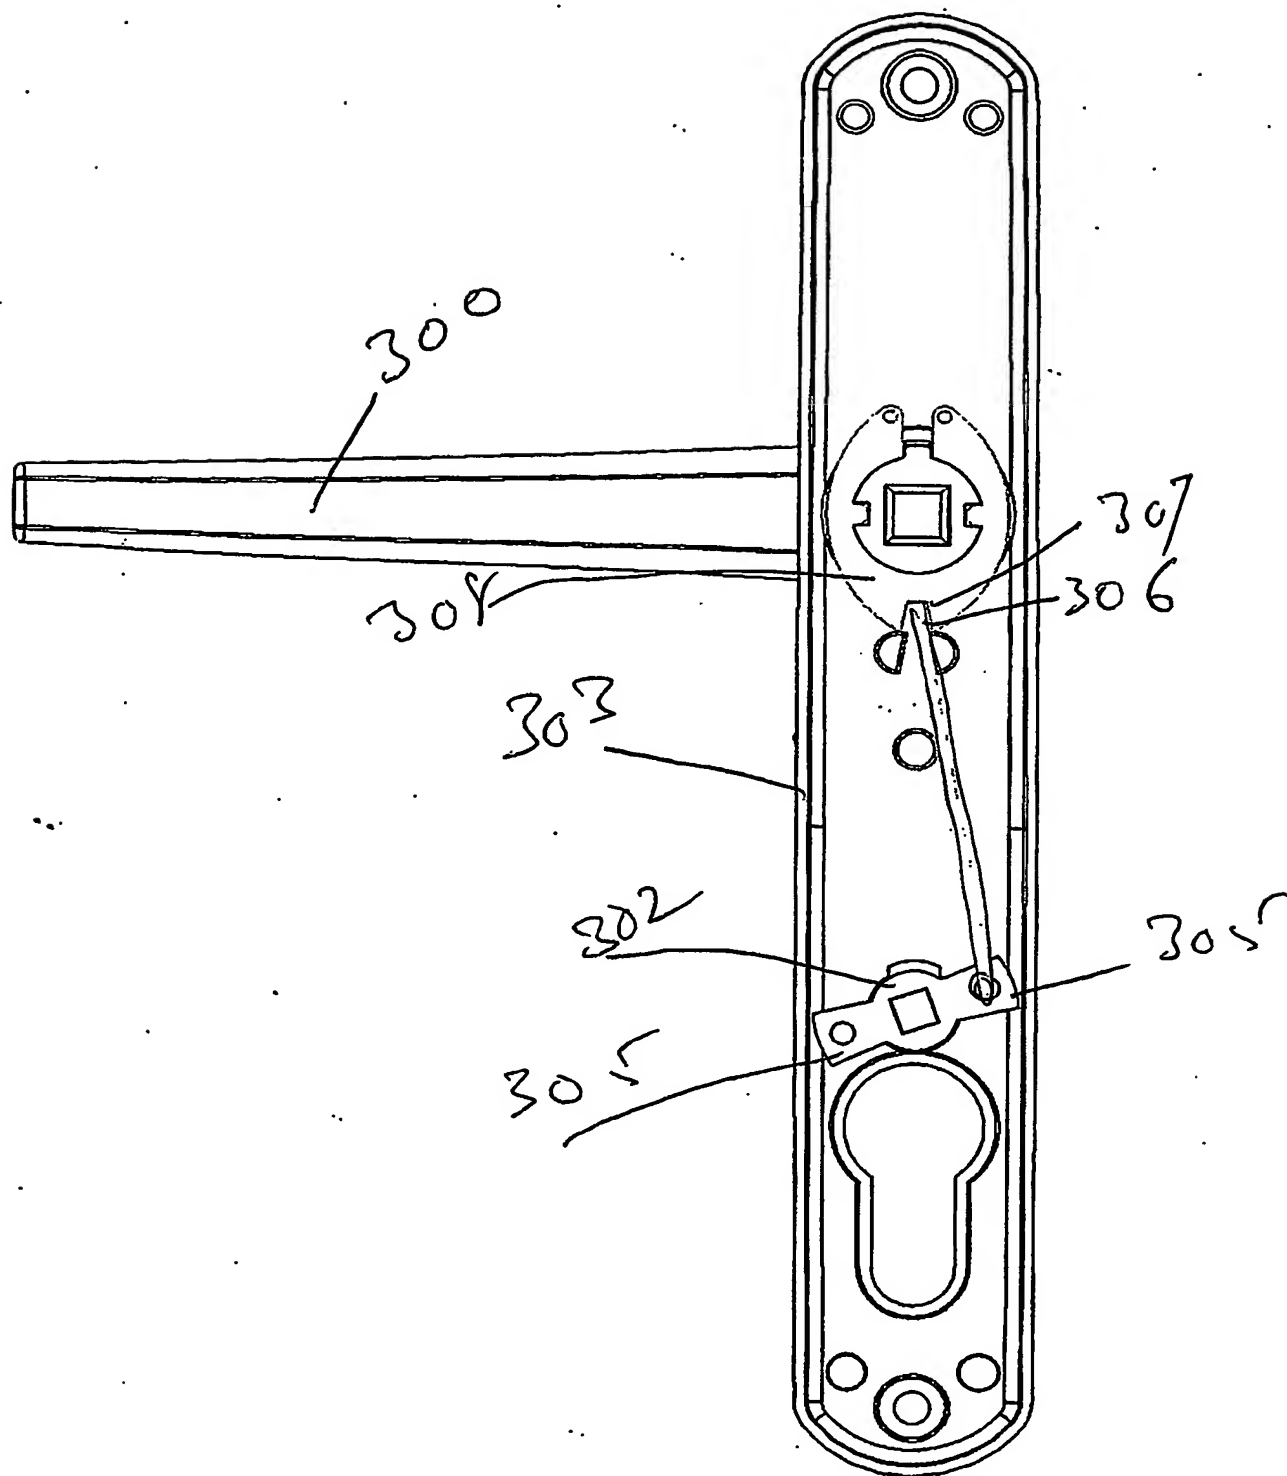


Fig 6


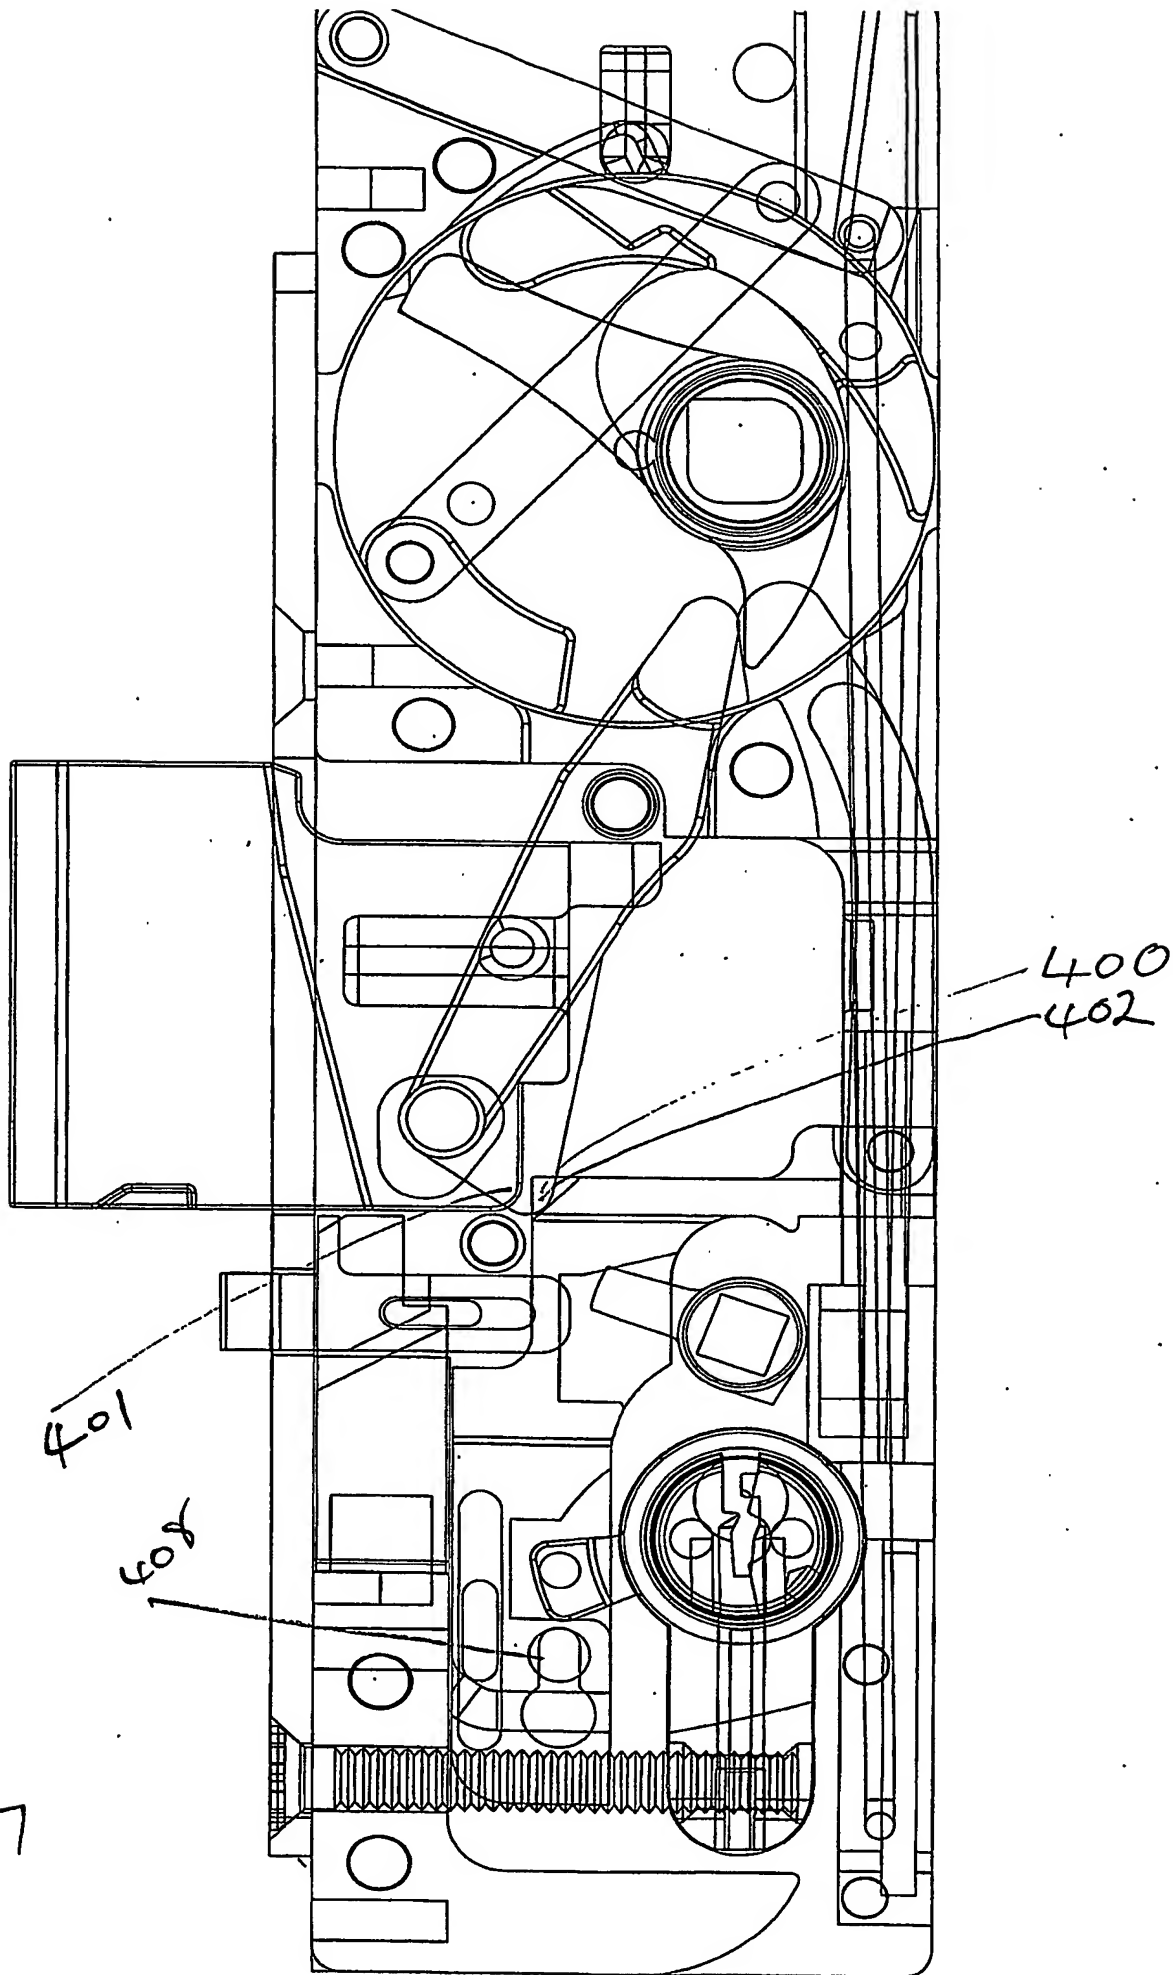


Fig 7

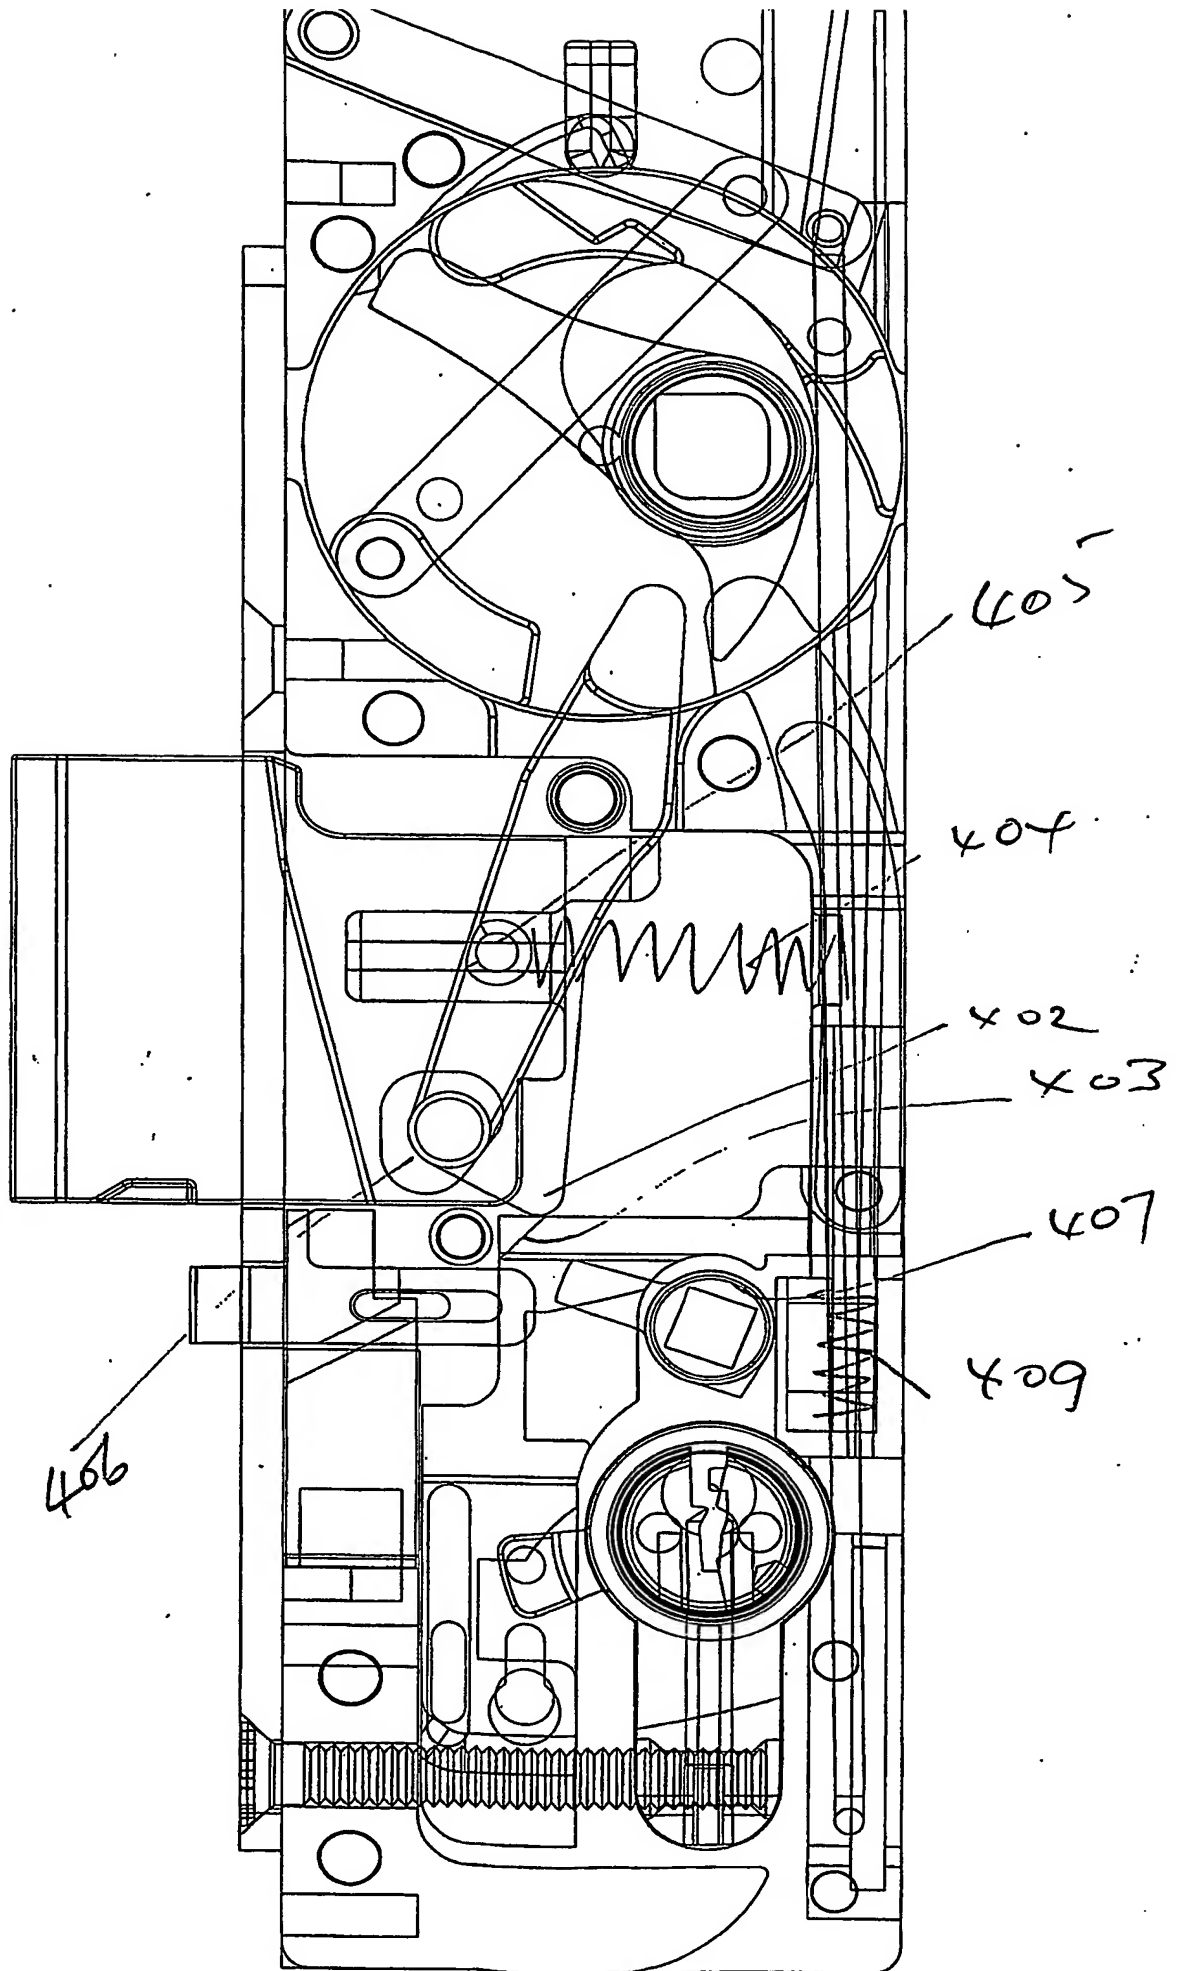

410

Fig 8

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**